

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/019467 A1

- (51) International Patent Classification⁷: **H02K 1/27**
- (21) International Application Number: **PCT/FI2003/000621**
- (22) International Filing Date: 26 August 2003 (26.08.2003)
- (25) Filing Language: Finnish
- (26) Publication Language: English
- (30) Priority Data:
20021524 26 August 2002 (26.08.2002) FI
- (71) Applicant (for all designated States except US): **ABB OY**
[FI/FI]; Strömbergintie 1, FIN-00380 Helsinki (FI).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **KOLEHMAINEN, Jere** [FI/FI]; Mörskynkatu 1, FIN-66510 Merikaaarto (FI). **PEKOLA, Jari** [FI/FI]; Hauentie 23-25-B 14, FIN-65200 Vaasa (FI). **IKÄHEIMO, Jouni** [FI/FI]; Tassintie 8, FIN-61300 Kurikka (FI).
- (74) Agent: **KORPELAINEN, Seppo**; ABB Oy, Legal Affairs/Patents, PL 210, FIN-00381 Helsinki (FI).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A ROTOR FOR A PERMANENT-MAGNET ELECTRICAL MACHINE AND A METHOD FOR MANUFACTURING IT

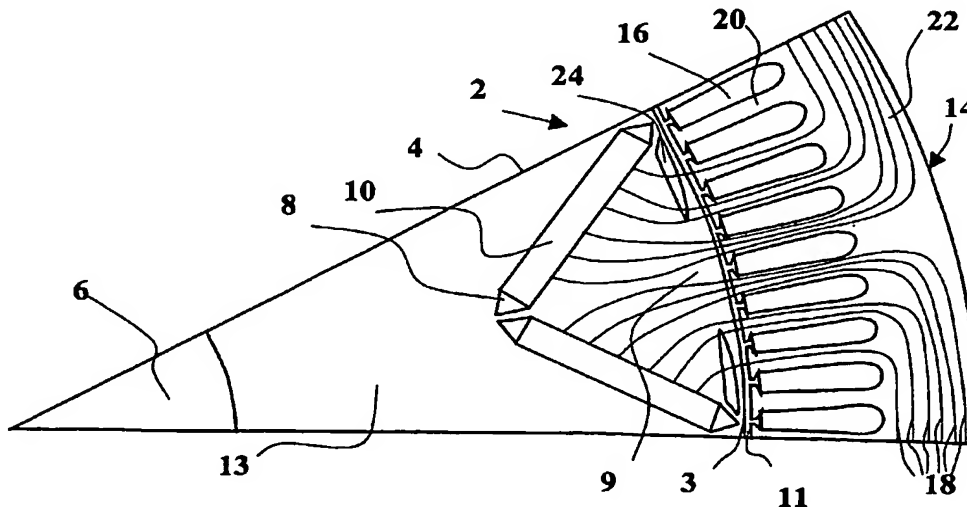

(57) Abstract: The object of the invention is a rotor (4) for a permanent-magnet electrical machine, comprising an axle (6) mounted to the machine body with bearings, a rotor pack made of iron and arranged around the axle (6), as well as permanent magnets (10) adapted to the rotor pack, used for forming the magnetic poles (9) of the rotor. According to the invention, the rotor poles (9) contain a slot (24) extending from both edges of the pole (9) essentially towards the centre of the pole; the slot (24) is closer to the outer circumference (3) of the rotor than the central axle of the rotor. The invention also includes a method for manufacturing such a rotor.

A ROTOR FOR A PERMANENT-MAGNET ELECTRICAL MACHINE AND A METHOD FOR MANUFACTURING IT

The object of the invention is a rotor for a permanent-magnet electrical machine according to the introduction part of claim 1. The object of the invention also includes a method for manufacturing a rotor according to the introduction part of claim 11.

The breakaway torque of an electrical machine is proportional to the air gap flux and the armature circuit current. It is essential for the operation of the machine that the breakaway torque must be uniform in all load conditions. The air gap flux induces a current in the armature circuit, used for measuring feedback quantities required for machine control. The quantities under measurement must be accurate and free of interference. The position of a rotor in a permanent-magnet electrical machine, such as a permanent-magnet synchronous machine controlled by a frequency converter, is often calculated on the basis of the stator current. In this case, it is essential for operational reliability that the current must be free of interference. Incorrect or uncertain feedback information will interfere with the control logic and the control of switches in the frequency converters.

The aim is to make the air gap flux in an AC machine or a similar electrical machine to be as accurately sinusoidal as possible. It is well known that this is hampered by issues such as slot harmonics caused by windings and disturbance factors due to the location of magnets and the shape of permanent-magnet poles. Permanent-magnet poles have been shaped by placing the permanent magnets appropriately and designing a suitable shape for the sheet pack that forms the magnet circuit of the rotor. For example, a solution is known from the patent application EP 0955714 where the outer circumference of a permanent-magnet rotor has a shape that causes the air gap width to vary sinusoidally within the pole area so that the air gap is at its minimum at the centre of the pole and increases towards the edges of the pole. The disadvantage of this functional solution is that it causes manufacturing problems in large and slow machines with a large rotor diameter and several pairs of poles, for example 12 poles.

A solution is also known, for example from the publication JP 2001-037127, where the air gap flux is controlled by means of radial slots in the rotor sheet pack, intended to direct the magnetic flux into the air gap with a distribution that is as sinusoidal as

possible. However, slots that extend almost to the outer circumference of the rotor do not guarantee an air gap flux that would change smoothly, in a sinusoidal form.

The purpose of this invention is to create a new permanent-magnet motor that would be economical to manufacture for all dimensioning requirements and that would achieve an
5 air gap smoothly following a sinusoidal form. In order to achieve this, the rotor according to the invention is characterised by the features specified in the characteristics section of claim 1. Correspondingly, the method according to the invention is characterised by the features specified in the characteristics section of claim 11. Other preferred embodiments of the invention are characterised by the features listed in the
10 dependent claims.

The variation of the air gap flux in a solution according to the invention essentially follows a sinusoidal form. The sinusoidality of the air gap flux in rotors with a large diameter and several poles can also be ensured by a means that is economical in terms of manufacturing technology. It is sufficient to die-cut or laser-cut appropriate slots in the
15 rotor sheets, eliminating the need for shaping the outer circumference of the rotor which is challenging in terms of manufacturing technology. The solution according to the invention keeps the air gap flux essentially sinusoidal also in load conditions.

The invention provides a preferred implementation particularly in terms of manufacturing technology. In addition, the invention is applicable as such to electrical
20 machines of different sizes and types.

The fundamental idea of the invention is based on modifying the effective air gap without actually changing the structure that forms the air gap in the machine – that is, the outer circumference of the rotor or the inner circumference of the stator. The structure according to the solution has only a minor effect on the distribution of
25 magnetic flux within the rotor sheet pack, because in the direction of the flux lines, the slots present a break perpendicular to the short flux line which will not disrupt the flux lines.

According to an embodiment of the invention, the slots in the rotor are located at a distance from the outer circumference of the rotor pack. According to another
30 embodiment, the permanent magnets are positioned in a V shape so that the magnets

extend to the vicinity of the outer circumference of the rotor and that the magnets forming a single pole are closer to each other at the axle end than at the outer circumference end.

According to yet another embodiment, the slot extends from the edge of the pole
5 towards the centre of the pole, essentially parallel with the outer circumference of the rotor.

According to a preferred embodiment, the width of the slot in the rotor sheet pack decreases in the radial direction of the rotor towards the centre of the rotor magnetic pole. Thus the effective air gap is increased to essentially correspond to a sinusoidally
10 changing air gap width.

According to an embodiment, the slots are curved at the centre of the pole from the outer circumference of the rotor towards the axle. Manufacturing technology does not allow the manufacture of very narrow slots, such as ones narrower than 0.5 mm, and for this reason, sinusoidality at the centre of the pole is further ensured by increasing the
15 distance between the additional air gap and the actual air gap. Thus the flux becomes curved in a way that optimises the distribution in the air gap.

According to an embodiment, the slot extends from the edge of the pole essentially towards the centre of the pole on the outer circumference of the rotor. In this case the distance between the slot and the air gap may be larger but the slot is still essentially
20 perpendicular to the flux direction and, in this embodiment as well, the effect of increased air gap is directed towards the edges of the pole rather than the centre, which makes it possible to achieve a sinusoidal form. This embodiment is particularly applicable to die-cut manufacturing, because the slot may be larger and its shape is regular. However, the effect of the slot on air gap flux distribution is appropriately
25 reduced by the fact that the slot is at a larger distance from the air gap.

According to a preferred embodiment, several slots are arranged to extend from both edges of the pole towards the centre of the pole, so that the effective increase in air gap is composed of several slots. In addition, the slots at the same edge of the pole are located at intervals from each other in the radial direction of the rotor and at least one
30 slot at both edges of the pole is essentially parallel with the outer circumference of the

rotor. This is particularly applicable to laser cutting technique where it is preferred to make slots of a limited width, such as slots in the range of 0.5 to 1.5 mm.

According to a further developed embodiment, the slots closer to the outer circumference of the rotor are wider and/or longer than the slots farther away from the
5 outer circumference of the rotor.

According to yet another embodiment, the permanent magnets are located on the surface of the outer circumference of the rotor and the slots are arranged inside the rotor at the positions of the permanent magnets in terms of the radial direction of the rotor.

10 According to yet another embodiment, the ridge between the magnet and the air gap is increased at the edge of the pole. In this case, the magnetic flux will close to the pole beside the ridge, making the air gap flux density between the poles essentially zero.

In the following, the invention will be described in detail with the help of certain embodiments by referring to the enclosed drawings, where

- 15 - Figure 1 illustrates the cross section of a rotor according to the invention,
- Figure 2 illustrates the cross section of a rotor according to a second embodiment of the invention,
- Figure 3 illustrates the cross section of a rotor according to a third embodiment of the invention,
- 20 - Figure 4 illustrates the cross section of a rotor according to a fourth embodiment of the invention,
- Figure 5 illustrates the cross section of a rotor according to a fifth embodiment of the invention,
- Figure 6 illustrates the cross section of a rotor according to a sixth embodiment of
25 the invention.

The Figures 1 to 5 illustrate a solution according to the invention in a permanent-magnet synchronous machine 2, where the magnets are embedded within the rotor. The machine is illustrated as a cross-sectional view in the axle direction, and the Figures contain identical reference numbers for parts corresponding to each other. The machine according to the example includes twelve magnetic poles; for clarity, only a sector illustrating a single pole is included here. The other poles are implemented similarly, with the exception that the magnetic pole alternates in a known way such that every other pole is an N pole and every other pole is a S pole. The rotor 4 in the machine 2 is assembled of magnetically conductive sheets, and the resulting rotor pack is adapted to the axle 6 of the machine. The rotor sheets contain slots 8 made by die-cutting, for example, and permanent magnet elements 10 are located in the slots. The permanent magnets are arranged in a V shape so that the magnets on both sides of a single pole 9 are close to each other in the rotor section towards the axle and essentially at the edges of the magnetic pole 9 in the vicinity of the outer circumference of the rotor. The outer circumference 3 of the rotor is essentially cylindrical. Even though the Figures 1 to 5 show a magnetic pole formed of two magnets in a V shape, the magnetic pole can be formed in many other ways in applications of the present invention. For example, there may be two magnets radially located at the edges of the pole, leaving the bottom of the "V" open in a sense, or the pole may be formed of three magnets, two at the edges of the pole and one between these, parallel with the outer circumference of the rotor. Furthermore, the permanent magnets may form a W shape or there may be several permanent magnets arranged in a sequence.

The stator 14 of the machine is formed of magnetically conductive sheets where grooves 16 have been cut for stator windings (not shown). As shown in Figure 1, the magnetic flux closes through the route illustrated by the flux lines 18: rotor magnet 10 – rotor pole 9 – air gap 11 – stator teeth 20 – stator back 22 and further (not shown) the stator teeth located at an adjacent pole – air gap – another rotor pole – another rotor magnet – rotor back 13 – rotor magnet 10. The magnetic flux lines tend to bend in the air gap so that the magnetic flux density in the air gap deviates from sinusoidal form. This is affected by magnet locations, route of flux in the teeth and stray fluxes. One method of changing the air gap flux to a more sinusoidal direction is modifying the rotor generator. For example, in the solution described in the patent application EP 0955714, the outer circumference

of the rotor is arranged so that the air gap is at its minimum at the centre of the pole and at its maximum at the edges of the pole.

In the embodiment illustrated in Figure 1, the rotor pole contains slots 24 essentially parallel with the outer circumference of the rotor, extending from the edges of the pole towards the centre of the pole so that the slot is widest at the edge of the pole. The slot becomes narrower towards the centre of the pole, and its length in the direction of the outer circumference is approximately one-third of the pole width. The slot, whose width is approximately 1.5 millimetres at its minimum, can be created by die-cutting the sheets forming the rotor pack before assembling the pack. When the slot is near the air gap of the machine, its effect on the distribution of the air gap flux is almost similar to the shape of the outer circumference of the rotor. The slots are arranged symmetrically on both edges of the pole.

Because the width of the slot cannot evenly decrease to zero, there is a slotless section at the centre of the pole with a width of approximately one-third of total pole width, causing a deviation from sinusoidal form in the distribution of air gap flux. This effect is reduced by the solution illustrated in Figure 2, where the slots 26 have been die-cut so that they curve towards the centre of the rotor when moving towards the centre of the pole.

For mechanical reasons the thickness of the rotor sheet pack must be sufficient on the edge of the pole at the location of the ridge 28 between the magnet and the air gap, for which reason the slot may not extend to the actual edge of the pole. In this case, the distribution of the air gap flux tends to deviate from sinusoidal form. To solve this problem, the embodiment illustrated in Figure 3, which contains a slot 29 at a distance from the end of the permanent magnet, has a ridge 30 between the rotor poles so large that the flux goes directly to the adjacent pole, not to the stator teeth and the stator windings fitted in the grooves between them. In this case, the voltage induced in the stator winding varies essentially sinusoidally.

According to a fourth embodiment, as illustrated in Figure 4, the rotor contains several slots 32 arranged sequentially in the flux direction – that is, the radial direction of the rotor. The slots preferably become narrower from the edges of the pole towards the centre. The slots are also curved towards the rotor axle, so that the distance from the

slots to the outer circumference of the rotor, and thus to the air gap of the machine, becomes larger when moving away from the edge of the pole. In this embodiment the width of the slots may be smaller than in the example illustrated in Figure 1, so that laser-cutting is a suitable method for making the slots. The distribution of the flux close
5 to the air gap can be fine-tuned by increasing the curvature of one or more slots, which has a corresponding effect on the air gap flux.

The idea of the present invention is that the route of the magnetic flux contains slots in the rotor and the flux must go over these slots. As described in connection with the embodiments illustrated in Figures 1 to 4, the effect on air gap flux distribution is larger
10 if the slot is closer to the air gap and if it is wider – that is, the effect is proportional to the length of the air gap formed by the slot in the direction of the flux. In the embodiment illustrated in Figure 5, the slots are arranged so that they steer the flux inside the iron part of the pole at a distance from the air gap. Thus the slots are arranged to extend from essentially close to the permanent magnet element towards the centre of
15 the pole in the air gap. The first slot 51 in particular extends from the air gap end of the permanent magnet element almost parallel with the outer circumference of the rotor. The second slot 52 extends from the side of the permanent magnet element, at a distance of approximately one-fifth of the element length, towards the air gap at one-sixth of the pole. The third slot 53 extends from the middle of the permanent magnet element
20 towards the intersection of approximately one-third of the pole and the air gap.

Figure 6 illustrates an embodiment where the invention is applied to a motor with magnets on the surface of the rotor, a so-called surface magnet solution. The rotor 61 is built of sheets die-cut to a circular form, for example, and permanent magnets 62 are fitted on the outer circumference 3 of the rotor. In order to control the air gap flux, the
25 rotor contains slots 63, for example die-cut in the sheets before assembly, so that at the edges of the pole, the slots are close to the permanent magnets, and the dimension of the slots in the direction of the magnetic flux lines – that is, perpendicular to the permanent magnet – is larger at the edges of the pole than at the end of the slot towards the centre of the pole. Because the magnetic flux seeks the shortest route for closure, the magnetic
30 flux density decreases at the edges of the permanent magnets and the air gap flux becomes closer to sinusoidal form. Particularly in this embodiment the back section 13

of the rotor may be made of solid iron, in which case the slots can be made by drilling appropriate axial holes in the rotor.

In the above, the invention has been described with the help of certain embodiments. However, the description should not restrict the scope of patent protection, but the
5 embodiments may vary within the framework of the claims presented below.

CLAIMS

1. A rotor (4) for a permanent-magnet electrical machine, comprising an axle (6) mounted to the machine body with bearings, a rotor pack made of iron and arranged around the axle (6), as well as permanent magnets (10) adapted to the rotor pack, used
5 for forming the magnetic poles (9) of the rotor so that the magnetic flux density is at its maximum at the centre of the pole and decreases towards the edges of the pole, **characterised** in that there are slots (24,26,32) in the rotor poles (9) on the route of the magnetic flux so that at least one slot (24,26,32) extends from both edges of the pole (9) essentially towards its centre and that the slot (24,26,32) is closer to the outer
10 circumference (3) of the rotor than the central axle of the rotor.
2. A rotor according to claim 1, **characterised** in that the slots (24,26,32) are located at a distance from the outer circumference (3) of the rotor.
3. A rotor according to claim 1 or 2, **characterised** in that the permanent magnets (10) are arranged in a V shape so that the magnets (10) extend to the vicinity of the outer
15 circumference (3) of the rotor and that the magnets (10) forming a single pole (9) are closer to each other at the end towards the axle (6) than at the end towards the outer circumference (3).
4. A rotor according to any of the claims 1 to 3, **characterised** in that the slot (24) extends from the edge of the pole (9) towards the centre of the pole (9) essentially
20 parallel with the outer circumference (3) of the rotor.
5. A rotor according to any of the claims 1 to 4, **characterised** in that the width of the slot (24) decreases towards the centre of the pole (9).
6. A rotor according to any of the claims 1 to 5, **characterised** in that the end of the slot (26) located towards the centre of the pole is curved towards the axle.
- 25 7. A rotor according to any of the claims 1 to 3, **characterised** in that the slot (24,26,51) extends from the edge of the pole essentially towards the centre of the pole on the outer circumference of the rotor.

8. A rotor according to any of the claims 1 to 7, **characterised** in that there are several slots (32,51,52,53) extending from both edges of the pole towards the centre of the pole, so that the slots on the same edge of the pole are located at an interval from each other in the radial direction of the rotor and that at least one slot (32,51) on both edges of the pole is essentially parallel with the outer circumference of the rotor.
9. An arrangement according to any of the claims 1 to 8, **characterised** in that the slots (32,51) closer to the outer circumference (3) of the rotor are wider and/or longer than the slots farther away from the outer circumference (3) of the rotor.
10. A rotor according to claim 1, **characterised** in that the permanent magnets (62) are located on the surface of the outer circumference (3) of the rotor and that the slots (63) are arranged inside the rotor at the positions of the permanent magnets (62) in terms of the radial direction of the rotor.
11. A method for manufacturing a permanent-magnet electrical machine so that the air gap flux has a sinusoidal form, said electrical machine comprising an axle (6) mounted to the machine body with bearings, with said method comprising the arrangement of rotor poles (9) around the axle (6), said poles made of magnetically conductive iron (13) and permanent magnets (10) adapted to it, **characterised** in that there are axial slots (24,26,32) in the rotor, essentially extending from the edge of the pole towards its centre.
12. A method according to claim 11, **characterised** in that the slots (24,26,32) are made by die-cutting.
13. A method according to claim 11, **characterised** in that the slots (24,26,32) are made using a laser.
14. A method according to claim 11, **characterised** in that the slots (63) are made by drilling axial holes in the rotor.

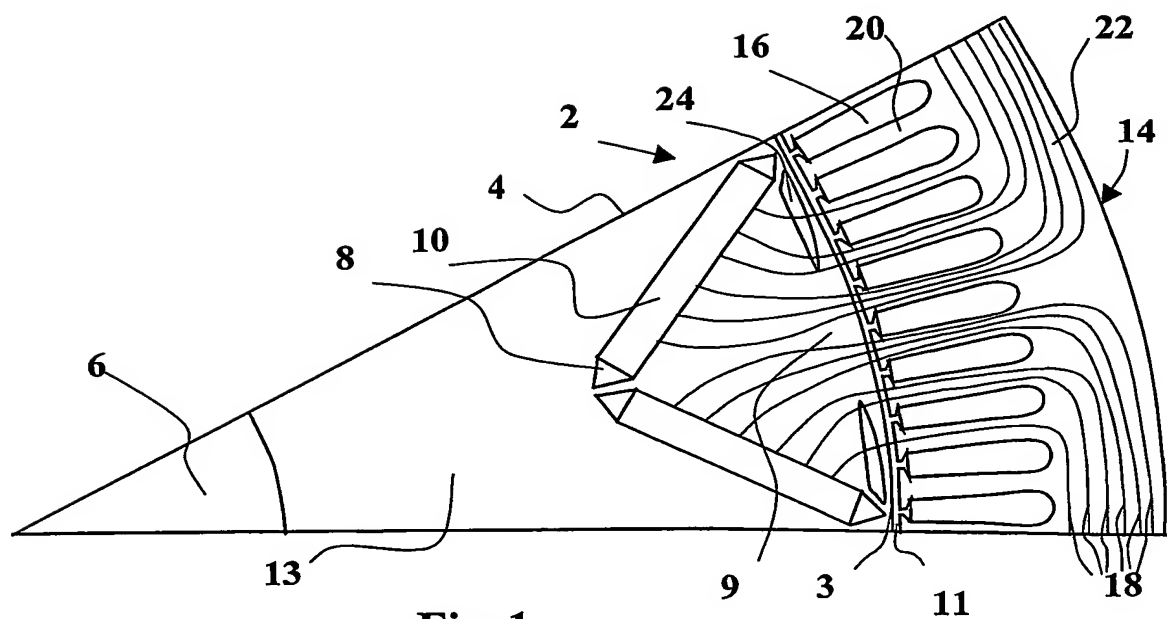


Fig. 1

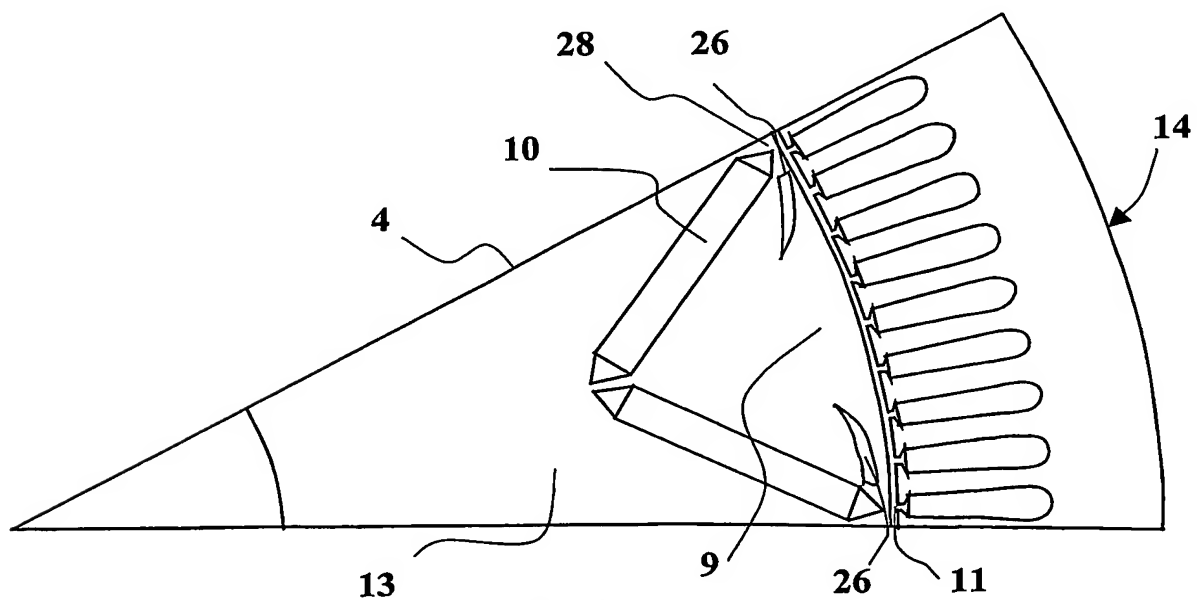


Fig. 2

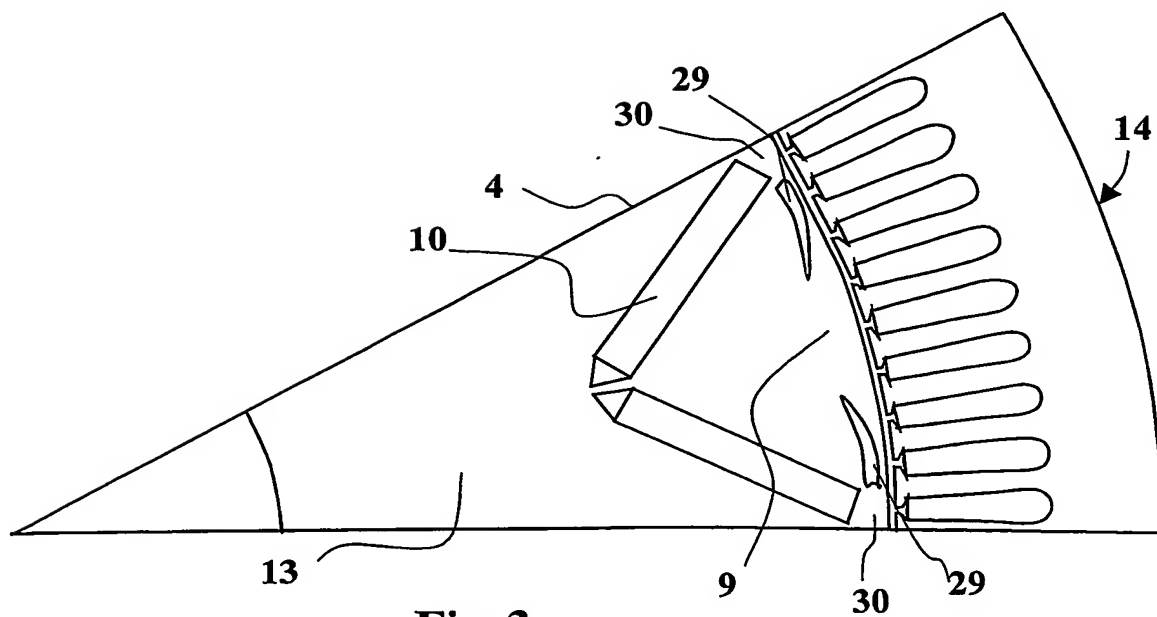


Fig. 3

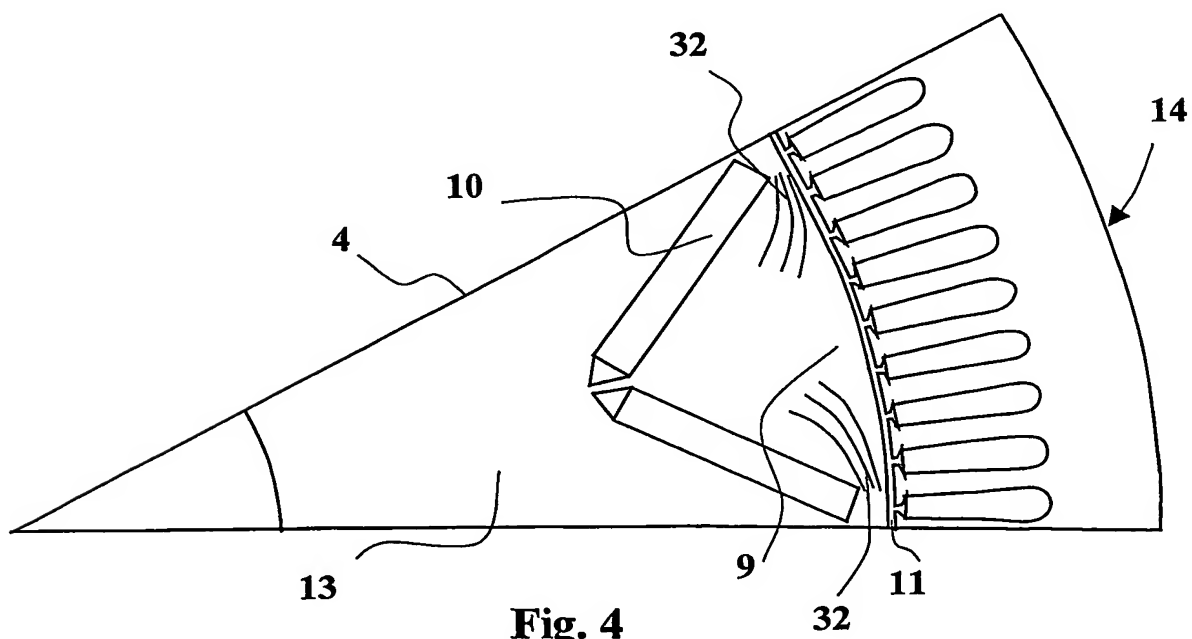


Fig. 4

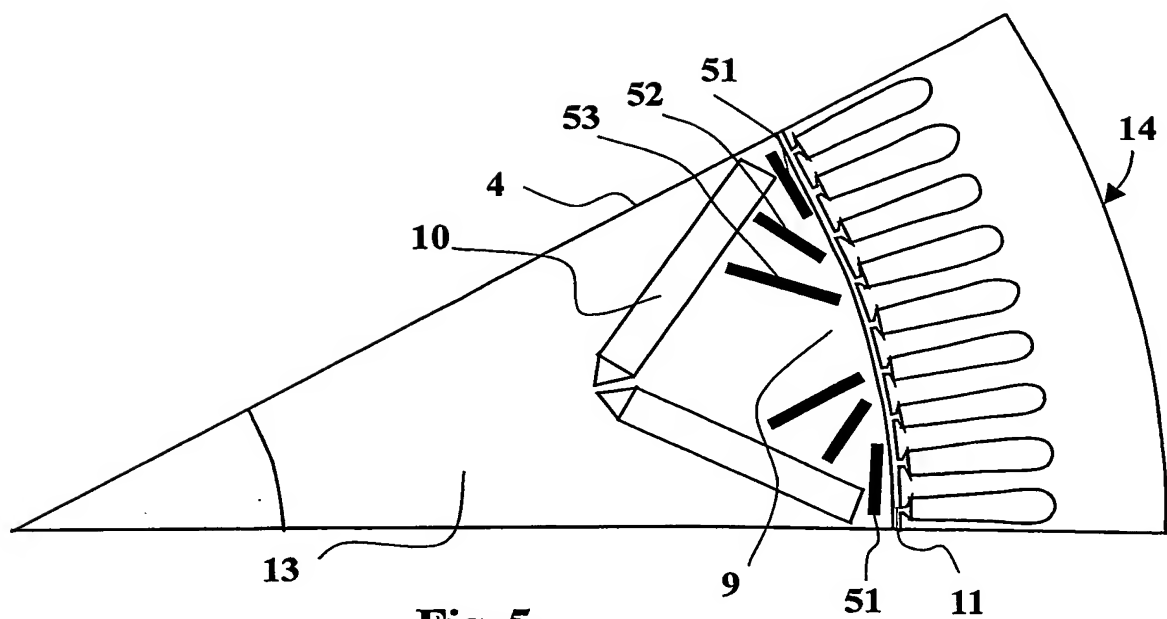


Fig. 5

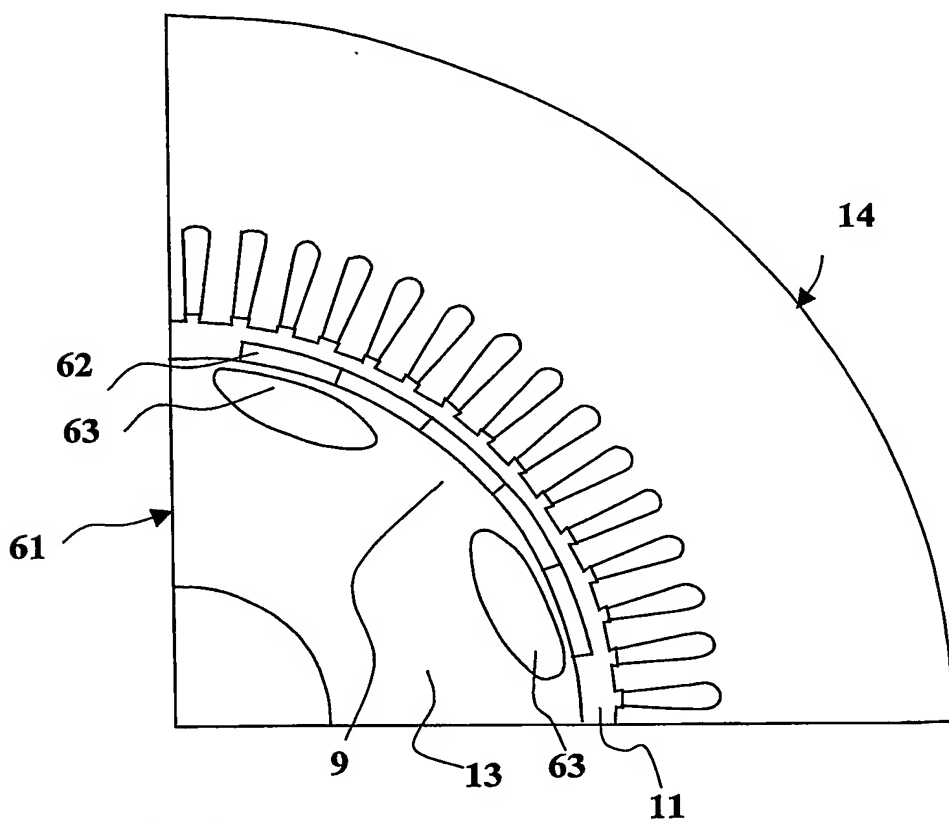


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP 03/00621

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H02K 1/27

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 11252840 A (MEIDENSHA CORP), 17 Sept 1999 (17.09.99)	1-2,4-7, 11-14
Y		3,8
A		9,10
	--	
Y	DE 19915664 A1 (SIEMENS AG), 19 October 2000 (19.10.00), column 3, line 6 - line 36, figure 1	3
A		1-2,4-14
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 November 2003

Date of mailing of the international search report

21-11-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Tomas Erlandsson/MN

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 03/00621

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4658165 A (CHRISTIAN VANDERSCHAEGHE), 14 April 1987 (14.04.87), column 4, line 11 - line 50, figure 2	1-2,7,11-14
Y		8
A		3-6,9-10
	--	
A	DE 19851883 A1 (SIEMENS AG), 18 May 2000 (18.05.00), abstract	1-14
	--	
A	EP 0955714 A2 (ABB MOTORS OY), 10 November 1999 (10.11.99), abstract	1-14
	-- -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

06/09/03

International application No.

PCT/FI 03/00621

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
JP	11252840	A	17/09/99	NONE		
DE	19915664	A1	19/10/00	WO	0062399 A	19/10/00
US	4658165	A	14/04/87	DE	3424939 A	17/01/85
				FR	2548843 A,B	11/01/85
DE	19851883	A1	18/05/00	NONE		
EP	0955714	A2	10/11/99	FI	980980 A	05/11/99